
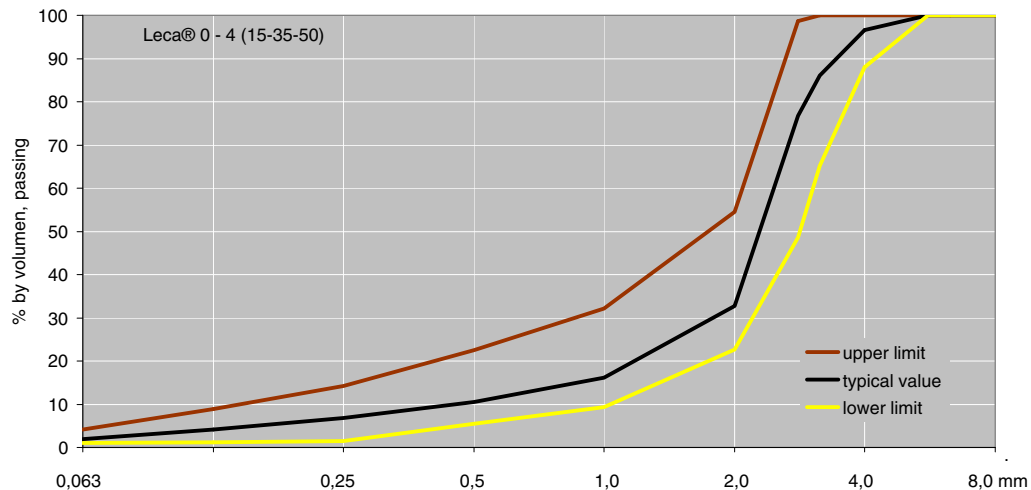
 04 0615 - CPD - 9739	Saint-Gobain Weber A/S Randersvej 75 · Hinge · DK-8940 Randers SV			
	BS EN 13055-1 Lightweight aggregate for concrete, mortar and grout.			
Product name	Leca® 0-4 (15-35-50)			
Article number	16 00 50 00			
Property	Test method	Declared value		
		Limits ¹	Typical value	
Aggregate size	BS EN 933-1	0,063 - 4 mm		
Particle shape		Round/cracked		
Aggregate size distribution	BS EN 933-1 Dry sieving	Mesh size	Passing	
		5,6 mm	100 - 100 %	100 %
		4 mm	90 - 100 %	97 %
		3,15 mm	70 - 100 %	87 %
		2,8 mm	55 - 99 %	78 %
		2 mm	30 - 65 %	50 %
		1 mm	15 - 45 %	30 %
		0,5 mm	10 - 35 %	22 %
		0,25 mm	4 - 25 %	16 %
	0,063 mm	3 - 10 %	6 %	
Loose bulk density	BS EN 1097-3	(Limits ±15%)	370 - 500 kg/m ³ 435 kg/m³	
Percentage of crushed particles		Not relevant		
Cleanliness	BS EN 1744-1	Not relevant		
Crushing resistance		Not relevant		
Chloride	BS EN 1744-1	max. 0,02 %		
Acid-soluble sulphate	BS EN 1744-1	max. 0,5 %		
Total sulphur	BS EN 1744-1	max. 0,32 %		
Volume stability		Not relevant		
Water absorption		Not relevant		
Emission of reactivity		NPD		
Release of heavy metals		NPD		
Release of polyaromatic carbons		Not relevant		
Release of other dangerous substances		NPD		
Duability against freeze/thaw		Not relevant		
Alkali-silica reactivity		Not relevant		

¹ 90 % tolerance interval with a confidence level of 90 % according to ISO 12491 unless otherwise stated

Additional declaration (not covered by the CE-marking)

Grading of aggregate mix converted to volume passing



The Leca® plant has the quality management system acc. to DS/EN ISO 9001:2000, the environmental management system acc. to DS/EN ISO 14001: and the energi managemnt system acc. to DS 2403:2001

Leca® is a registered trademark owend by Leca Trading & Concession A/S