
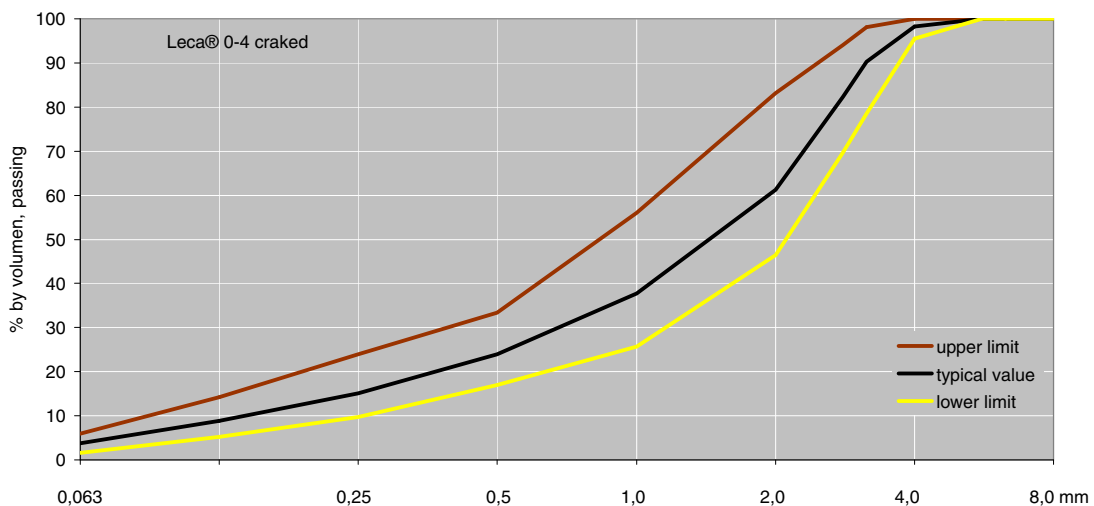
 04 0615 - CPD - 9739		<b>Saint-Gobain Weber A/S</b> Ølstvej 6 · Ølst · DK-8940 Randers SV		
		<b>BS EN 13055-1</b> <b>Lightweight aggregate for concrete, mortar and grout.</b>		
Product name		Leca® 0 - 4 cracked		
Article number		15 03 00 00		
Property	Test method	Declared value		Typical value
		Limits <sup>1</sup>		
Aggregate size	BS EN 933-1			0 - 4 mm
Particle shape		Cracked		
Aggregate size distribution	BS EN 933-1 Dry sieving	Mesh size		Passing
		5,6 mm	100 - 100 %	100 %
		4 mm	97 - 100 %	99 %
		3,15 mm	85 - 99 %	94 %
		2 mm	60 - 90 %	74 %
		1 mm	40 - 70 %	54 %
		0,5 mm	30 - 50 %	40 %
		0,25 mm	20 - 40 %	29 %
		0,063 mm	5 - 15 %	11 %
Loose bulk density	BS EN 1097-3	( Limits ±15% )		375 - 505 kg/m <sup>3</sup> 440 kg/m <sup>3</sup>
Percentage of crushed particles		Not relevant		
Cleanliness	BS EN 1744-1	Not relevant		
Crushing resistance		Not relevant		
Chloride	BS EN 1744-1	max.	0,04 %	
Acid-soluble sulphate	BS EN 1744-1	max.	0,5 %	
Total sulphur	BS EN 1744-1	max.	0,32 %	
Volume stability		Not relevant		
Water absorption		Not relevant		
Emission of reactivity		NPD		
Release of heavy metals		NPD		
Release of polyaromatic carbons		Not relevant		
Release of other dangerous substances		NPD		
Duability against freeze/thaw		Not relevant		
Alkali-silica reactivity		Not relevant		

<sup>1</sup> 90 % tolerance interval with a confidence level of 90 % according to ISO 12491 unless otherwise stated

**Additional declaration (not covered by the CE-marking)**

Property	Test method	Declared value		Typical value
		Limits <sup>1</sup>		
Particle density	DIN V 18004:2004-04 Abschnitt 6	( Limits ±15% )		800 - 1080 kg/m <sup>3</sup> 940 kg/m <sup>3</sup>

Grading of aggregate mix converted to volume passing



The Leca® plant has the quality management system acc. to DS/EN ISO 9001:2000, the environmental management system acc. to DS/EN ISO 14001:2004 and the energi management system acc. to DS 2403:2001

Leca® is a registered trademark owned by Leca Trading & Concession A/S